



FLOW-THRU DRAIN BAR

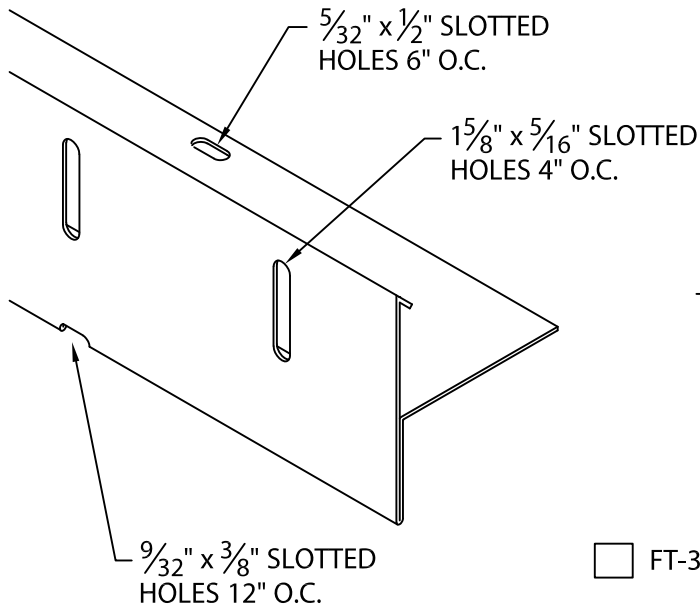

☐ FT-375 (3 $\frac{3}{4}$ ")

☐ FT-500 (5")

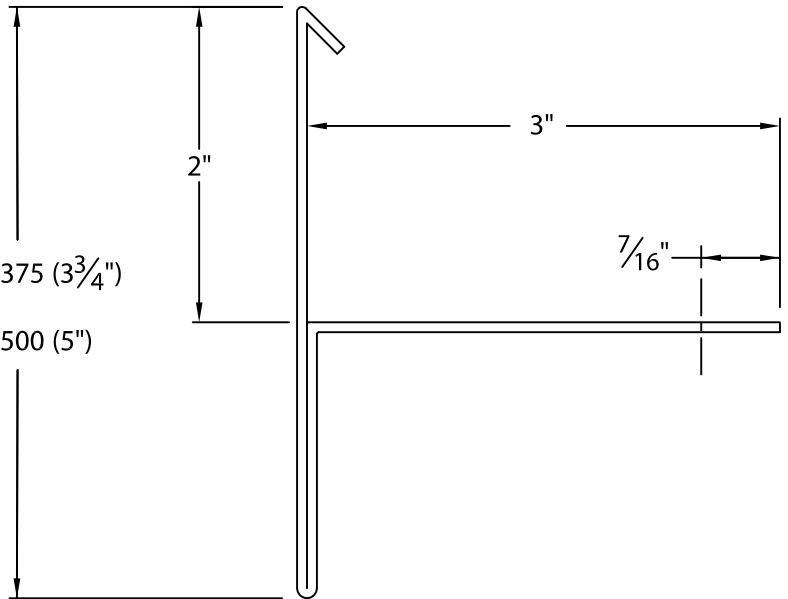

NOTES:

- INCLUDES 6" WIDE CONCEALED SPLICE PLATES AT EACH JOINT.
- CONCEALED SPLICE PLATES MUST BE FIELD CAULKED TO PREVENT WATER ENTRY.

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Tremco's printed instructions.

Approved by: _____

Date: _____

MATERIAL:

___ .040" ALUMINUM

___ .050" ALUMINUM

COLOR: _____

FINISH: _____

QUANTITIES:

_____ LINEAL FEET 12'-0" LENGTHS

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

TREMCO ROOFING AND BUILDING MAINTENANCE
3735 GREEN RD; BEACHWOOD, OH 44122
PHONE: 262-953-2666
EDGESYSTEMS@TREMCOINC.COM
WWW.TREMCOROOFING.COM

TREMCO
ROOFING & BUILDING MAINTENANCE

DATE: 04/04/19

DRN BY: ZS

CKD BY: SAK

SHT.# ___ OF ___

DWG# 60016-30960

A