

# TremLock® SL

## Standing Seam Metal Roof System



### FEATURES

- Factory applied rib sealant
- Snap together panels
- Hidden Clips

### BENEFITS

- Ensures a uniform seal in the seam
- No field seaming required
- Clean architectural look

### DESCRIPTION

TremLock SL roof panels are a factory roll formed material from 24 or 22 gauge Galvalume® steel, coated both sides with a layer of 55% aluminum-zinc alloy coated by the hot dip process per ASTM specification A792/ A792M. Panels are joined by an integral locking seam and held in place by concealed clips. A bead of sealant is factory applied in the TremLock SL seam.

### BASIC USES

The TremLock SL roof system is 1.75" tall standing seam system, featuring hidden clips and a snap-together seam, eliminating jobsite seaming. The clean lines of this system is ideal for commercial use. The roof system may also be used in a near vertical application such as fascias, mansards or equipment screens.

### SYSTEM DESIGN

TremLock SL metal roof system is designed with coverages of 12", 16" or 18" and up to 75' in length. The TremLock SL system can be installed over solid deck or open framing with a minimum slope of 3:12.

### FINISH/COLOR


Acrylic Coated Galvalume  
Fluoropolymer (Kynar 500® PVFD resin-based)  
Oil canning is inherent in all metal panels and is not cause for panel rejection.

### APPLICATION


TremLock SL is installed over solid deck or open framing.

### PROFILES

#### Striated (Standard):

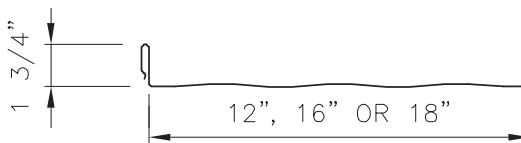


#### Bead (Pencil) Rib (Optional):

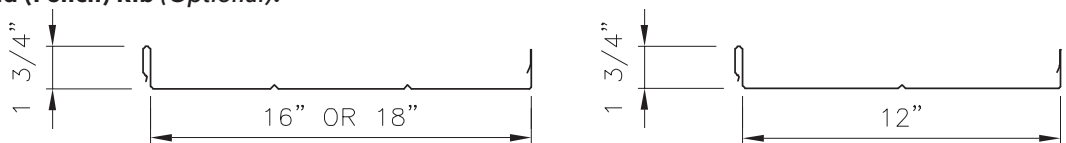

#### Flat (Optional):



#### UL-90 Clip:



## PHYSICAL PROPERTIES

# TremLock® SL

TITLE OF TEST	TEST METHOD
Uplift Test	UL580 Class 90; ASTM E1592
Fire Rating	Class A
Air Filtration	ASTM E1680
Water Filtration	ASTM E1646
Impact Resistance	UL 2218 Class 4
Florida State Approval	FL 1747.5 & FL 1832.7
Fire Resistance	UL 263 & UL 790 Class A
Miami-Dade Approval	
ICC-ES Approval	ESL-1082

## MAINTENANCE

Your local Tremco Roofing sales representative can provide you with effective maintenance procedures which may vary, depending upon specific conditions. Periodic inspections, early repairs and preventative maintenance are all part of a sound roof program.

## PRECAUTIONS

Users must read container labels and Safety Data Sheets for health and safety precautions prior to use.

## TECHNICAL SUPPORT

Your local Tremco Roofing sales representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications.



[www.tremcoroofing.com](http://www.tremcoroofing.com)  
3735 Green Road  
Beachwood, Ohio 44122  
1.800.852.6013

220 Wicksteed Avenue  
Toronto, Ontario, M4H 1G7  
1.800.668.9879

Tremco Roofing and Building  
Maintenance is part of Tremco  
Construction Products Group.

Tremco is a US Registered trademark of Tremco CPG Inc.

The information provided on this data page supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCE SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.

TremLock® is a U.S. registered trademark of Tremco CPG Inc.

Kynar 500® is a U.S. registered trademark of Arkema Inc.

Hylar 5000® is a U.S. registered trademark of Solvay Solexis, Inc.

Galvalume® is a U.S. registered trademark of BIEC International Inc.

Fluoropon® is a U.S. registered trademark of SWIMC LLC.