

Skylight Guard Data Worksheet

For domed type skylights with curbs or resting on roof

To ensure that your Skylight Guard is fabricated and estimated correctly, it's important that you provide the Tremco team with the most accurate information you can.

Start by identifying the curb and frame style that most closely resembles your skylight. Measure all required dimensions and record them in the corresponding boxes in the charts below. We also request that you provide a photo, and if possible, a drawing of your skylight to ensure a proper fit.

For frame types not pictured, fill out all the applicable dimensions and attach a photo; we will evaluate a solution.

COMPANY _____

ATTN: _____


PHONE _____

FAX _____

EMAIL _____

Check here to add the Skylight Demarcation Kit to your quote.

Check here to add Tremco Skylight Guard Hail Screen to your quote




OPTIONAL SKYLIGHT DEMARCATION KIT (BW501005)

The Skylight Demarcation Kit provides the visual location of skylights on snow-covered rooftops. Four orange colored fiberglass markers are used to indicate each corner of the skylight. On larger skylights, additional markers can be installed around the periphery. The markers easily attach to all of Tremco's Skylight Guards and are also designed to fit other manufacturer's skylight screens. The Skylight Demarcation Kit is not intended to replace OSHA required skylight protection.

NOTE: Maximum Skylight Guard size- 62" wide x 120" long, with 8" clearance from guard to dome to meet CAL OSHA. 72" W x 120" L, with 4" clearance needed to meet Federal OHSA.

STEP 1: Measure Overall Dimensions.

W	L	H1	H2

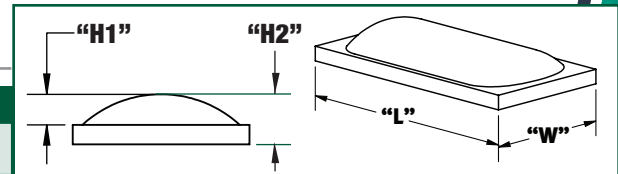

STEP 2: Select your type of skylight frame then fill in additional dimensions and quantity required.

SKYLIGHT DOME

□ Frame Type 1

A	B	QTY

SKYLIGHT DOME

□ Frame Type 2

A	B	C	D	E	QTY

SKYLIGHT DOME

□ Frame Type 3

A	B	C	D	E	QTY

SKYLIGHT DOME

□ Frame Type 4

A	B	C	D	E	QTY