

Battery-Powered Cartridge Gun


For Application of Dual-Component Tremco Adhesives

FEATURES

- Battery powered
- Quick and easy use
- Trigger delay
- Durable construction
- Strong motor

BENEFITS

- Portable, no cords or hoses
- Saves time and labor
- Saves battery charge
- Withstands everyday use
- Can dispense higher viscosity adhesives

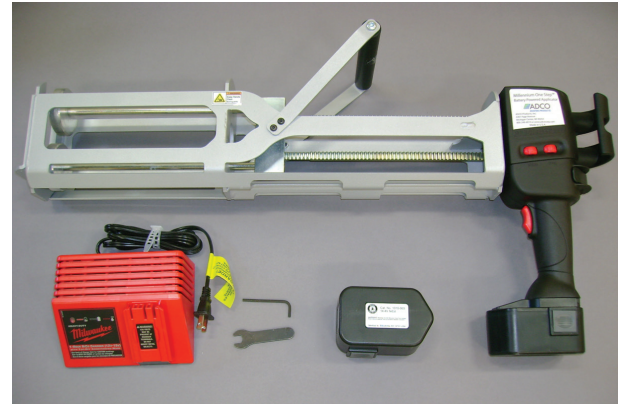

DESCRIPTION

Battery-Powered Cartridge Gun is specially designed to be used with 1.5L units of dual-component Tremco adhesive products such as Tremco Low Rise Foam Insulation Adhesive, Tremco LR Adhesive and Tremco LF Adhesive. The unique carriage design is extremely durable and allows the user to install adhesive in an upright position eliminating back strain. The tool is powered by a 14.4 volt rechargeable battery. The motor is designed to run on lower amps than conventional cordless tools which extends overall battery life and reduces charging time.

PACKAGING

Battery-Powered Cartridge Gun includes 2 recharge-able NiCd batteries, 1 battery charger, and 1 detach-able carriage handle.

USER INSTRUCTIONS

1. Assemble carriage handle using the provided (4) screws and lock nuts with the wrench and allen key (also included).
2. Open the clutch lever to allow movement of the racks. Retract the rack by pulling the rack handle away from the tool.
3. Prepare adhesive cartridge by removing caps or plugs and installing static mixing nozzle.
Note: Follow complete instructions for cartridge preparation as described in product data sheet.
4. Insert cartridge into the carriage. Line up the cartridge and the cartridge nozzle opening for correct positioning.
5. Push the rack handle forward, lining up pistons with the openings on the cartridge. Close the clutch lever to engage clutch.
6. Slide the battery onto the handle until it is fully engaged.
7. Adjust speed control knob to desired flow. High speed is designated on the knob by the largest "bubble" symbol. Slower speeds; smaller bubbles. **Note:** Most applications will require the tool to be operated at full speed.
8. Hold trigger to begin dispensing adhesive. **Note:** Trigger must be depressed 2 times before tool operates when it has sat idle. This is a power saving feature built into the tool.
9. When finished dispensing, or when end of cartridge is reached, release trigger, open clutch, then retract rack. Remove cartridge.

MAINTENANCE INSTRUCTIONS

- Keep handles clean, dry and free of oil or grease.
- Clean with mild soap and damp cloth. Do not use solvents or cleaning agents that can damage the tools plastic parts.
- Follow cleaning and maintenance instructions in battery charger manual and battery pack leaflet.
- Remove adhesive residue from rack and pistons regularly if present. Apply light coating of light machine oil to lubricate rack as needed.
- For internal lubrication and all other maintenance, except external cleaning and battery pack recharging, and for all repairs, return to service center, distributor, or manufacturer.
- If the tool is not running at full capacity, check to be sure that the battery pack is fully charged and that the contacts on the battery pack and tool are both clean. If they need maintenance, use caution and clean with an eraser.

Battery-Powered Cartridge Gun

SAFETY

Tool service must be performed only by qualified repair personnel. Service or maintenance performed by unqualified personnel may result in risk of an injury. **Do not disassemble tool or battery pack.** At the conclusion of its useful life, remove battery pack from tool. Without further disassembly, return battery pack intact for recycling and/or discard tool intact. Disassembly and reassembly may create an unsafe condition.

When servicing a tool, use only identical replacement parts. Use of unauthorized parts or failure to follow Maintenance Instructions may create a risk of electrical shock or injury.

MAINTENANCE

Your local Tremco Roofing representative can provide you with effective maintenance procedures, which may vary depending upon specific conditions. Periodic inspections, early repairs and preventive maintenance are all part of a sound roof program.

PRECAUTIONS

Users must read container labels and Safety Data Sheets for health and safety precautions prior to use.

TECHNICAL SUPPORT

Your local Tremco Representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications. The services of the Tremco Research Center, which has earned a unique reputation in weatherproofing technology, complement and extend the service of the Tremco Service Staff.



www.tremcoroofing.com
3735 Green Road
Beachwood, Ohio 44122
1.800.852.6013

220 Wicksteed Avenue
Toronto, Ontario, M4H 1G7
1.800.668.9879

Tremco Roofing and Building
Maintenance is part of Tremco
Construction Products Group.

Tremco is a US Registered trademark of Tremco CPG Inc.

The information provided on this data page supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCE SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.