


AlphaGuard[®] PUMA Top Coat

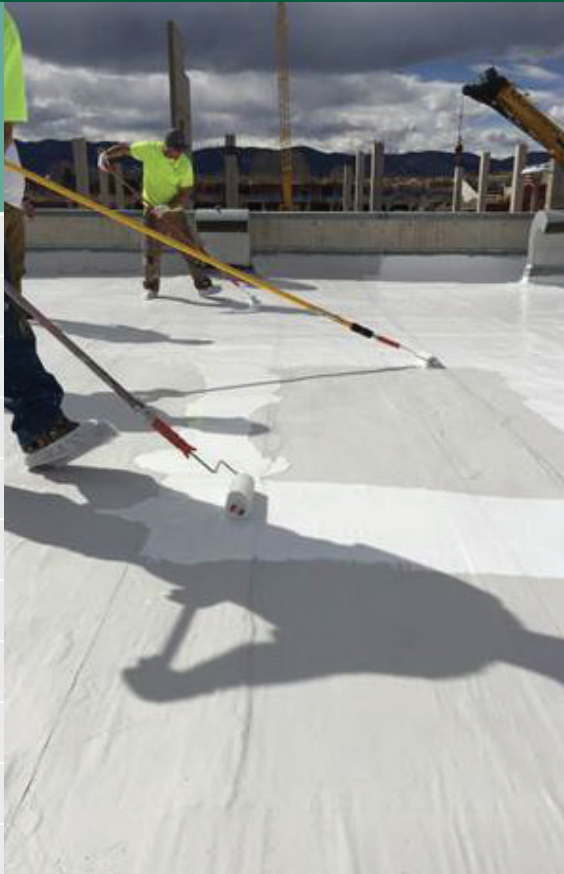

High performance, two-component, methyl methacrylate finishing resin

FEATURES

- PUMA Technology
- Low Temperature Applications
- Catalyzed Cure
- High Solids
- Reflective Top Coat
- Plant Root Resistance
- VOC Compliant

BENEFITS

- Unique technology typically provides higher elongation and crack bridging properties than comparable MMA/PMMA technology
- Product can be applied in freezing temperatures.
- Results in faster cure than one-component products
- 100% Solids
- Lower Surface Temperatures
- Potential Energy Savings
- Highly durable system prevents damage caused by plant roots in vegetative roofing installations
- 0 g/L; Can be used anywhere (No VOC restrictions)

DESCRIPTION:

AlphaGuard PUMA Top Coat is a high performance, two-component, UV resistant, methyl methacrylate waterproofing resin.

BASIC USES:

The AlphaGuard PUMA system is ideal for restoration, repair and waterproofing of a variety of roofing systems and can be used as the primary roofing system in IRMA and vegetative roof assemblies. AlphaGuard PUMA can also be installed as the roofing system in direct to structural concrete applications. AlphaGuard PUMA can also be used as a liquid flashing membrane for approved new roofing systems.

PACKAGING:

Available in 6 gallon (22.71 L) container.

COLOR:

White

GRADE:

Brush / Roller / Squeegee.

POT LIFE:

10 - 15 minutes.

**Pot life dependent on ambient, substrate, and product temperature and the amount of AlphaGuard PUMA Catalyst used.*

STORAGE LIFE:

12 months in unopened containers. Recommended storage conditions are indoors in a ventilated, dry area removed from heat, open flame, ignition sources, and direct sunlight. Storage temperatures should range from 60-70°F (15-21°C) and must not exceed 110°F (43°C).

On the job site, materials should remain on the pallet until use and be stored in a shaded, ventilated area. Materials should be covered with a light-colored, reflective tarp for protection against the elements. Allow for adequate air flow inside the pallets.

Shelf life could be effected if the product is not stored properly.

APPLICATION:

Preparation: The surface of previously applied AlphaGuard PUMA Base

AlphaGuard® PUMA Top Coat

APPLICATION:
(continued)

Coat must be clean, dry, solid, and free of dirt, grease, oil, algae, and other debris prior to application of the AlphaGuard PUMA Top Coat.

Repairs: If AlphaGuard PUMA is being installed over an existing roof system, all appropriate repairs should be made prior to applying the AlphaGuard PUMA system. Allow suggested cure time of repairs before application.

Mixing: Use a heavy duty power drill with Jiffy Mixer attachment. Cordless drills are not recommended and may not properly mix the materials.

AlphaGuard PUMA Top Coat must be mixed to achieve a uniform distribution and appearance of the product. Once properly mixed, AlphaGuard PUMA Top Coat can be poured off in smaller quantities into a second container. Add the appropriate amount of AlphaGuard PUMA Catalyst to the selected amount of top coat and mix thoroughly until powder catalyst is completely dissolved. Catalyze only the amount of top coat intended to be used within the expected pot life. The amount of AlphaGuard PUMA Catalyst required is based on the amount of top coat used and the ambient temperature (Refer to the mixing chart for proper mixing ratios).

Application: Apply AlphaGuard PUMA Top Coat at 1¼ gal / 100 sq. ft. (20 wet mils) minimum over cured reinforced AlphaGuard PUMA Base Coat.

Non-Skid Application: In areas where a slip resistant surface is required, mask off designated areas and apply an additional layer of AlphaGuard PUMA Top Coat at 1 gal/100 sq. ft. (16 wet mils) minimum over the cured AlphaGuard PUMA System. Broadcast 20-40 mesh silica sand into the wet coating at 10-15 lbs/100 sq. ft. (0.5-0.7 kg/m²) and backroll. Remove masking tape before top coat cures.

MIXING CHART:

**AG PUMA
TOP COAT
AMOUNT**

½ gal (4.56 lbs)
1.89 L (2.06 kg)
1 gal (9.12 lbs)
3.78 L (4.13 kg)
3 gal (27.36 lbs)
11.34 L (12.41 kg)
6 gal (54.72 lbs)
22.68 L (24.82 kg)

ALPHAGUARD PUMA CATALYST AMOUNTS BY TEMPERATURE RANGES

70-95°F (21-35°C) 2% Catalyst			60-70°F (15-21°C) 4% Catalyst			40-60°F (5-15°C) 5% Catalyst			32-40°F (0-5°C) 6% Catalyst			< 32°F (< 0°C) 6% Catalyst + Accelerator		
oz	lbs	g	oz	lbs	g	oz	lbs	g	oz	lbs	g	oz	lbs	g
2	0.09	40	3	0.18	90	4	0.22	100	5	0.26	120	5	0.26	120
3	0.18	80	6	0.35	160	8	0.44	200	10	0.53	240	10	0.53	240
10	0.53	240	19	1.06	480	24	1.32	600	29	1.59	720	29	1.59	720
19	1.06	480	38	2.12	960	48	2.65	1,200	58	3.17	1,440	58	3.17	1440

ACCEPTABLE ROOF SURFACES/SUBSTRATES:

Smooth BUR	Gravel BUR	Concrete	Foam	Modified Bitumen	Metal	Single Ply	SPUF	Walls
●	■	●	■	●	■	■	■	■

COVERAGE RATE:

1¼ gal / 100 sq. ft. (20 mils).

LIMITATIONS:

- Not for use over expanded polystyrene, extruded polystyrene, plywood, tongue and groove decks, wood decks, poured in place gypsum, lightweight insulating concrete, lightweight structural concrete, cementitious wood fiber decks, coal tar pitch, gravel surfaced BUR, corrugated metal roof systems, and SPUF roofing substrates.
- Do not apply in falling precipitation or when precipitation is imminent.
- Only apply when ambient temperature is -20°F - 95°F (-28°C - 35°C).

CLEAN UP:

Clean tools immediately after use with AlphaGuard PUMA Cleaner.

PRECAUTIONS:

Use Tremco AlphaGuard PUMA Membrane with adequate ventilation. If the product is applied in enclosed areas without natural ventilation, forced



AlphaGuard® PUMA Top Coat

PRECAUTIONS: (continued)

ventilation must be arranged. Avoid strong concentration of vapor as well as direct contact with skin or eyes. Users must read container labels and Safety Data Sheets for health and safety precautions prior to use.

PHYSICAL PROPERTIES:

Physical Property	Test Method	Typical Value
Tensile Strength	ASTM D5147	177 lbf/in
Elongation	ASTM D5147	199% (Unreinforced) 40% (Reinforced)
Tear Strength	ASTM D5147	178 lbf
Hardness	ASTM D2240	93 Shore A
Low Temperature Flexibility	ASTM D7264	Pass @ -26°F
Vapor Transmission	ASTM E96	0.23 perms
Water Absorbtion	ASTM D570	0.2 - 8 hours 0.8 - 24 hours
Static Puncture Resistance	ASTM D5602	56 lbf
Crack Bridging	ASTM D5147	Pass - 2mm
Abrasion Resistance	ASTM D4060	270 mg
Dimensional Stability	ASTM D5147	0.11
Hydrostatic Resistance	ASTM D751	413 psi
VOC	ASTM D3960	0 g/L
SRI (White Top Coat)	ASTM D1980	96

CODES & APPROVALS:



MAINTENANCE:

Your local Tremco Roofing Representative can provide you with effective maintenance procedures which may vary, depending upon specific conditions. Periodic inspections, early repairs and preventative maintenance are all part of a sound roof program.

TECHNICAL SERVICES:

Your local Tremco Representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications. The services of the Tremco Research Center, which has earned a unique reputation in weatherproofing technology, complement and extend the services of the Tremco Technical Service Staff.



7056
01/25/17

www.tremcoroofing.com
3735 Green Road
Beachwood, Ohio 44122
1.800.852.6013



50 Beth Neelson Drive
Toronto, Ontario M4H 1M6
1.800.668.9879

AlphaGuard is a U.S. registered trademark of Tremco, Inc.

The information provided on this data sheet is effective as of March 2016 and supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCES SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.