

Battery-Powered Cartridge Gun


For Application of Dual-Component Tremco Adhesives

Description

Battery-Powered Cartridge Gun is specially designed to be used with 1.5L units of dual-component Tremco adhesive products such as Tremco Low Rise Foam Insulation Adhesive, Tremco LR Adhesive and Tremco LF Adhesive. The unique carriage design is extremely durable and allows the user to install adhesive in an upright position eliminating back strain. The tool is powered by a 14.4 volt rechargeable battery. The motor is designed to run on lower amps than conventional cordless tools which extends overall battery life and reduces charging time.

User Instructions

1. Assemble carriage handle using the provided (4) screws and lock nuts with the wrench and allen key (also included).
2. Open the clutch lever to allow movement of the racks. Retract the rack by pulling the rack handle away from the tool.
3. Prepare adhesive cartridge by removing caps or plugs and installing static mixing nozzle.
Note: Follow complete instructions for cartridge preparation as described in product data sheet.
4. Insert cartridge into the carriage. Line up the cartridge and the cartridge nozzle opening for correct positioning.
5. Push the rack handle forward, lining up pistons with the openings on the cartridge. Close the clutch lever to engage clutch.
6. Slide the battery onto the handle until it is fully engaged.
7. Adjust speed control knob to desired flow. High speed is designated on the knob by the largest "bubble" symbol. Slower speeds; smaller bubbles.
Note: Most applications will require the tool to be operated at full speed.
8. Hold trigger to begin dispensing adhesive. Note: Trigger must be depressed 2 times before tool operates when it has sat idle. This is a power saving feature built into the tool.
9. When finished dispensing, or when end of cartridge is reached, release trigger, open clutch, then retract rack. Remove cartridge.

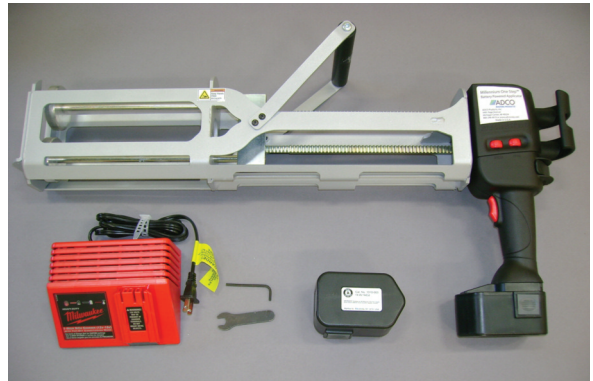

Packaging:

Battery-Powered Cartridge Gun includes 2 rechargeable NiCd batteries, 1 battery charger, and 1 detachable carriage handle.

Description

Battery Powered

Maintenance Instructions

- Keep handles clean, dry and free of oil or grease.
- Clean with mild soap and damp cloth. Do not use solvents or cleaning agents that can damage the tools plastic parts.
- Follow cleaning and maintenance instructions in battery charger manual and battery pack leaflet.
- Remove adhesive residue from rack and pistons regularly if present. Apply light coating of light machine oil to lubricate rack as needed.
- For internal lubrication and all other maintenance, except external cleaning and battery pack recharging, and for all repairs, return to service center, distributor, or manufacturer.
- If the tool is not running at full capacity, check to be sure that the battery pack is fully charged and that

Product Advantages	
Features	Benefits
Battery powered	Portable, no cords or hoses
Quick and easy use	Saves time and labor
Trigger delay	Saves battery charge
Durable construction	Withstands everyday use
Strong motor	Can dispense higher viscosity adhesives

TREMCO

Roofing & Weatherproofing Peace of Mind™

the contacts on the battery pack and tool are both clean. If they need maintenance, use caution and clean with an eraser.

Safety

Tool service must be performed only by qualified repair personnel. Service or maintenance performed by unqualified personnel may result in risk of an injury. **Do not disassemble tool or battery pack.** At the conclusion of its useful life, remove battery pack from tool. Without further disassembly, return battery pack intact for recycling and/or discard tool intact. Disassembly and reassembly may create an unsafe condition.

When servicing a tool, use only identical replacement parts. Use of unauthorized parts or failure to follow Maintenance Instructions may create a risk of electrical shock or injury.

Precautions: Users must read container labels and Material Safety Data Sheets for health and safety precautions prior to use.

Availability and Cost: Contact your local Tremco Roofing Representative for pricing and availability. For the name and number of your Representative, call the Roofing Division at 216/292-5000.

Guarantee/Warranty: Tremco Inc. warrants Battery-Powered Cartridge Gun to be free of defects. Under this warranty, any Battery-Powered Cartridge Gun product that is proved to be defective when applied in accordance to our written instructions, and in applications recommended by Tremco as suitable for this product will be replaced with like product at no charge. THIS IS BUYER'S SOLE AND EXCLUSIVE REMEDY.

All claims concerning product defects must be made in writing within six (6) months of shipment. The absence of such claims in writing during this period will constitute a waiver of all claims with respect to such product.

This warranty shall be IN LIEU OF any other warranty, express or implied, including but not limited to, any implied warranty of MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

Technical Services: Your local Tremco Representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications. The services of the Tremco Research Center, which has earned a unique reputation in weatherproofing technology, complement and extend the services of the Tremco Technical Service staff.

Statement of Policy and Responsibility:

Tremco takes responsibility for furnishing quality materials and for providing specifications and recommendations for their proper installation.

As neither Tremco itself nor its Representatives practice architecture or engineering, Tremco offers no opinion on, and expressly disclaims any responsibility for the soundness of any structure on which its products may be applied. If questions arise as to the soundness of a structure or its ability to support a planned installation properly, the Owner should obtain the opinion of competent structural engineers before proceeding. Tremco accepts no liability for any structural failure or for resultant damages, and no Tremco Representative is authorized to vary this disclaimer.



3735 Green Road
Beachwood, OH 44122
216-292-5000

220 Wicksteed Ave
Toronto, ONT M4H 1G7
416-421-3300