


TremPly® KEE Flashing Accessories

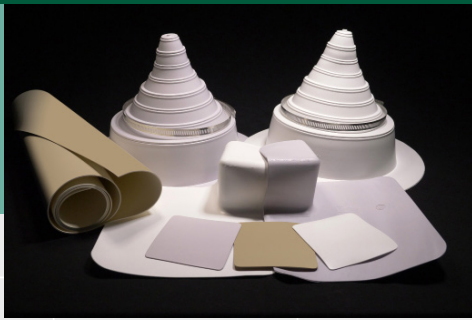

Pre-molded and sheet form, non-reinforced flashing accessories to complement the TremPly KEE and KEE FB Roofing Systems

DESCRIPTION:

DuPont's™ Elvaloy® KEE (Ketone Ethylene Ester) compound is the principle polymer in TremPly KEE flashing components.

All pre-molded TremPly KEE flashing accessories are injection molded. Pipe flashings will accommodate cylindrical penetrations between 1" and 6" in diameter. Universal inside and/or outside corner flashings accommodate 90° inside or outside wall, curb and other rectangular penetration corners.

T-joint covers and non-reinforced flashing rolls are also available.

BASIC USES:

Using pre-molded pipe and universal inside/outside corner flashings significantly improves installation consistency and reduces labor.

A non-reinforced, 60 mil TremPly KEE membrane is available for unusual penetrations and flashing details where the pre-molded flashings will not work.

APPLICATION:

The application information provided in this data sheet is designed to serve as a general guide. Please refer to Tremco application guides and project specific specifications or consult with your local Tremco Representative for project specific application requirements. Refer to the Safety Data Sheet (SDS) for material precautions.

PHYSICAL PROPERTIES:

	Property	Typical Value
Pre-Molded Pipe Flashing:	Packaging	8 ea. per carton
Pre-Molded Inside/Outside Corner:	Packaging	20 ea. per carton
Non-Reinforced Sheet:	Packaging	24 in. / 50 ft. rolls
T-Joint Covers:	Packaging	7 lb. box / 100 each per box

*Colors: TremPly KEE flashing accessories are stocked in our standard white, gray and tan.

MAINTENANCE:

Your local Tremco Roofing representative can provide you with effective maintenance procedures, which may vary depending upon specific conditions. Periodic inspections, early repairs and preventive maintenance are all part of a sound roof program.

TECHNICAL SERVICES:

Please contact your local Tremco Roofing representative. Working with the Technical Service Staff, your representative can help analyze conditions and needs to develop recommendations for special applications.

TremPly® KEE Flashing Accessories



7253
8/10/18

www.tremcoroofing.com
3735 Green Road
Beachwood, Ohio 44122
1.800.852.6013



50 Beth Neelson Drive
Toronto, Ontario M4H 1M6
1.800.668.9879

TremPly is a U.S. registered trademark of Tremco Incorporated.

The information provided on this data sheet is effective as of June 2018 and supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCES SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.