


TremPly® TPO Cover Tape HW

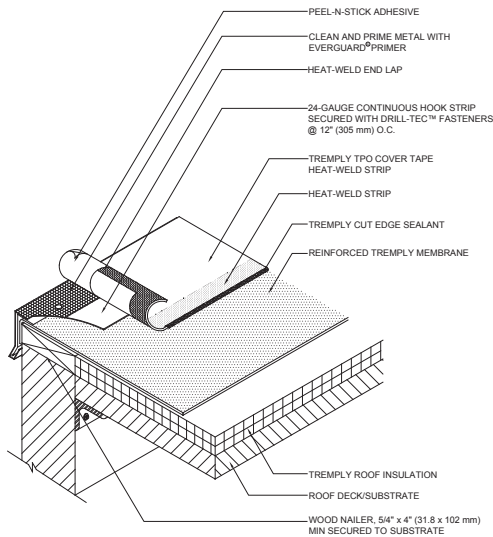

An Accessory Designed for TremPly TPO Single Ply Roof System

FEATURES

Cost effective

Factory-built accessories

Uniform look

BENEFITS

Reduces installed costs

Improved reliability, reduces risk of leaks and callbacks

Improved aesthetics

DESCRIPTION:

TremPly® TPO Cover Tape HW provides roofing contractors with an easy-to-install, factory-built detail. It is constructed from Tremco's proven, durable, high-performance TremPly TPO.

BASIC USES:

TremPly TPO Cover Tape HW is constructed from reinforced 45 mil TremPly TPO membrane; the six-inch-wide (152 mm) tape has a three-inch (76 mm) self-adhered area and a three-inch (76 mm) heat-weldable area. For use in stripping-in primed galvanized edge metal and to install end laps.

COLORS:

White, Tan, Gray

PACKAGING:

Roll length 100' (30.5 m), Roll width 6" (152 mm). 2 Rolls per carton; Weight, 34 lbs. (15.42 kg) per carton; 27 Cartons per pallet.

APPLICATION:

The self-adhered membrane area is adhered to primed edge metal while the heat-weldable area is attached to the roofing membrane using the welding machine of choice. See published application and specifications manual for detailed instructions.

MAINTENANCE:

Your local Tremco Roofing representative can provide you with effective maintenance procedures, which may vary depending upon specific conditions. Periodic inspections, early repairs and preventive maintenance are all part of a sound roof program.

TECHNICAL SERVICES:

Your local Tremco Roofing representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications.



7153
6/13/18

www.tremcoroofing.com
3735 Green Road
Beachwood, Ohio 44122
1.800.852.6013



50 Beth Neelson Drive
Toronto, Ontario M4H 1M6
1.800.668.9879

TremPly is a U.S. registered trademark of Tremco Incorporated.

The information provided on this data sheet is effective as of December 2017 and supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCES SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.