

TREMLOCK®

SOFFIT PANEL

PRODUCT INFORMATION

Composition and Material:

TremLock Soffit panels are factory roll formed 24 or 29 gauge Galvalume steel, zinc coated by hot-dip process per ASTM A792/A792M. The Galvalume panel is coated with Kynar® 500 / Hylar® 5000. Refer to color chart for available colors.

Basic Use:

TremLock Soffit panels are intended for use as a soffit panel only. TremLock Soffit panels are not intended for use in roofing or mansard applications. These panels can also be vented to allow for airflow and under eave ventilation.

System Design:



TremLock Soffit Panels are designed for soffit applications. The Soffit panels have coverage of 12" for vented or non vented panels a height of 3/8" with major rib spacing 6" oc. minimum length of 6" and maximum length of 20 ft. The vented soffit panel has a 10% net free area.

Application Data:

TremLock Soffit panels are typically installed over solid substrate or open framing under eave. Oil canning (pan wave) is a natural occurrence in metal panels and is not cause for panel rejection

Finish and Color:

TremLock Soffit Panels are available as standard with a full strength fluoropolymer (70% Kynar 500/ Hylar 5000 resin) system of 1.0 mil (.025 mm) total dry film thickness. Underside; 0.3 – 0.4 mil dry film thickness.

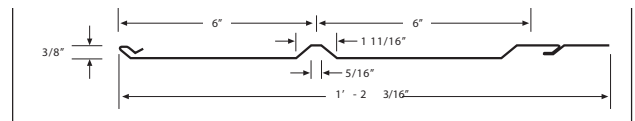

TremLock Soffit
Vented
10% Net Free Area

TremLock Soffit
Non-Vented

PANEL OPTIONS

Panel Coverage: 12"
 Panel Height: 3/8"
 Minimum Panel Length: 6"
 Maximum Panel Length: 20'
 Major Rib Spacing: 6" o.c.
 Pan Configurations:
 Vented
 Non-Vented
 Standard Substrate:
 24 Gauge Galvalume
 29 Gauge Galvalume
 Coating System: Kynar 500

TREMCO
 ROOFING & BUILDING MAINTENANCE

AVAILABILITY AND COST:

Contact your local Tremco Roofing Representative for pricing and availability. For the name and number of your local representative, call the Roofing Division at 216/292-5000.

MAINTENANCE:

Your local Tremco Roofing Representative can provide you with effective maintenance procedures, which may vary depending upon specific conditions. Periodic inspections, early repairs and preventive maintenance are all part of a sound roof program.

GUARANTEE/WARRANTY:

Tremco Incorporated warrants TremLock Soffit Panel to be free of defects and to meet published physical properties when tested according to ASTM and Tremco standards. Under warranty, any TremLock Soffit Panel product that is proved to be defective when applied in accordance to our written instructions, and in applications recommended by Tremco as suitable for this product will be replaced with like product at no charge. THIS IS BUYER'S SOLE AND EXCLUSIVE REMEDY.

All claims concerning product defects must be made in writing within twelve (12) months of shipment. The absence of such claims in writing during this period will constitute a waiver of all claims with respect to such product.

This warranty shall be IN LIEU of any other warranty, express or implied, including but not limited to, any implied warranty of MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

TECHNICAL SERVICES:

Your local Tremco Representative, working with the Technical Service staff, can help analyze conditions and needs to develop recommendations for special applications. The services of the Tremco Research Center, which has earned a unique reputation in weatherproofing technology, complement and extend the services of the Tremco Technical Service Staff.

STATEMENT OF POLICY AND RESPONSIBILITY:

Tremco takes responsibility for furnishing quality materials and for providing specifications and recommendations for their proper installation.

As neither Tremco itself or its Representatives practice architecture or engineering, Tremco offers no opinion on, expressly disclaims any responsibility for the soundness of any structure on which its products may be applied. If questions arise as to the soundness of a structure or its ability to support a planned installation properly, the Owner should obtain the opinion of competent structural engineers before proceeding. Tremco accepts no liability for any structural failure or for the resultant damages, and no Tremco Representative is authorized to vary this disclaimer.

Kynar 500 is a registered trademark of Elf Atochem North America, Inc.
Hylar 5000 is a registered trademark of Ausimont USA, Inc.
TremLock is a registered trademark of Tremco Incorporated

An **RPM** Company

TREMCO
ROOFING & BUILDING MAINTENANCE

3735 Green Road
Beachwood, OH 44122
216-292-5000
220 Wicksteed Ave
Toronto, ONT M4H 1G7
416-421-3300

Rev 3/11