



NON 90° COPING MITERS

OUTSIDE MITER - OBTUSE

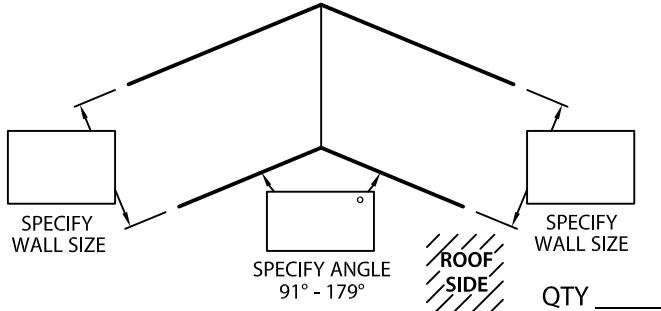


OUTSIDE MITER - ACUTE

INTERNAL USE

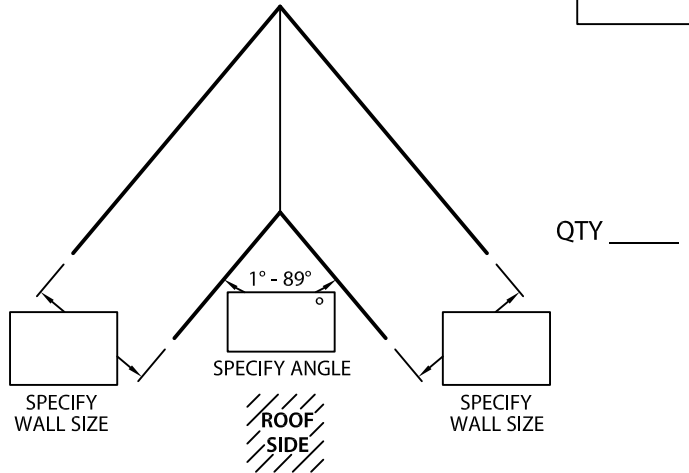


INSIDE MITER - OBTUSE

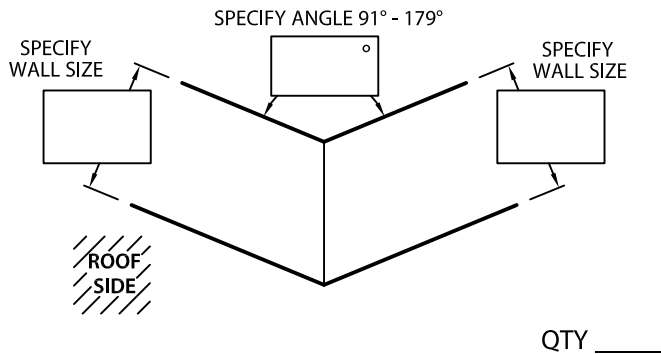

INSIDE MITER - ACUTE

INTERNAL USE

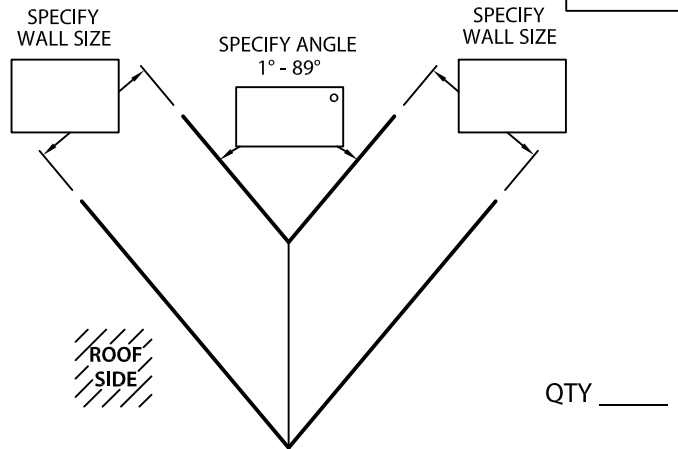

NOTES:

--- FOR CUSTOM LEG LENGTHS MODIFY DRAWING ABOVE.

- ① WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".

MATERIAL:

___ 24 GA. GALVANIZED STEEL

___ 22 GA. GALVANIZED STEEL

___ .040" ALUMINUM

___ .050" ALUMINUM

___ .063" ALUMINUM

___ OTHER _____

COLOR: _____

FINISH: _____

SPECIFY ACCESSORY TYPE:

- ☐ WELDED ①
☐ QUICKLOCK

AUTHORIZED SIGNATURE:

APPROVED BY: _____

DATE: _____

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

TREMCO ROOFING AND BUILDING MAINTENANCE
3735 GREEN RD; BEACHWOOD, OH 44122
PHONE: 262-953-2666
EDGESYSTEMS@TREMCOINC.COM
WWW.TREMCOROOFING.COM

TREMCO
ROOFING & BUILDING MAINTENANCE

DATE: 07/11/18

DRN BY: JJC

CKD BY: SAK

SHT.# _____ OF _____

DWG# 60011-29182

A

NON 90° COPING MITERS

RIGHT ANGLES ARE 90°
ACUTE ANGLES RANGE FROM 1° - 89°
OBTUSE ANGLES RANGE FROM 91° - 179°

