



8" WIDE CONCEALED SPLICE PLATE WITH
FACTORY APPLIED DUAL NON-CURING
SEALANT STRIPS AT EACH JOINT

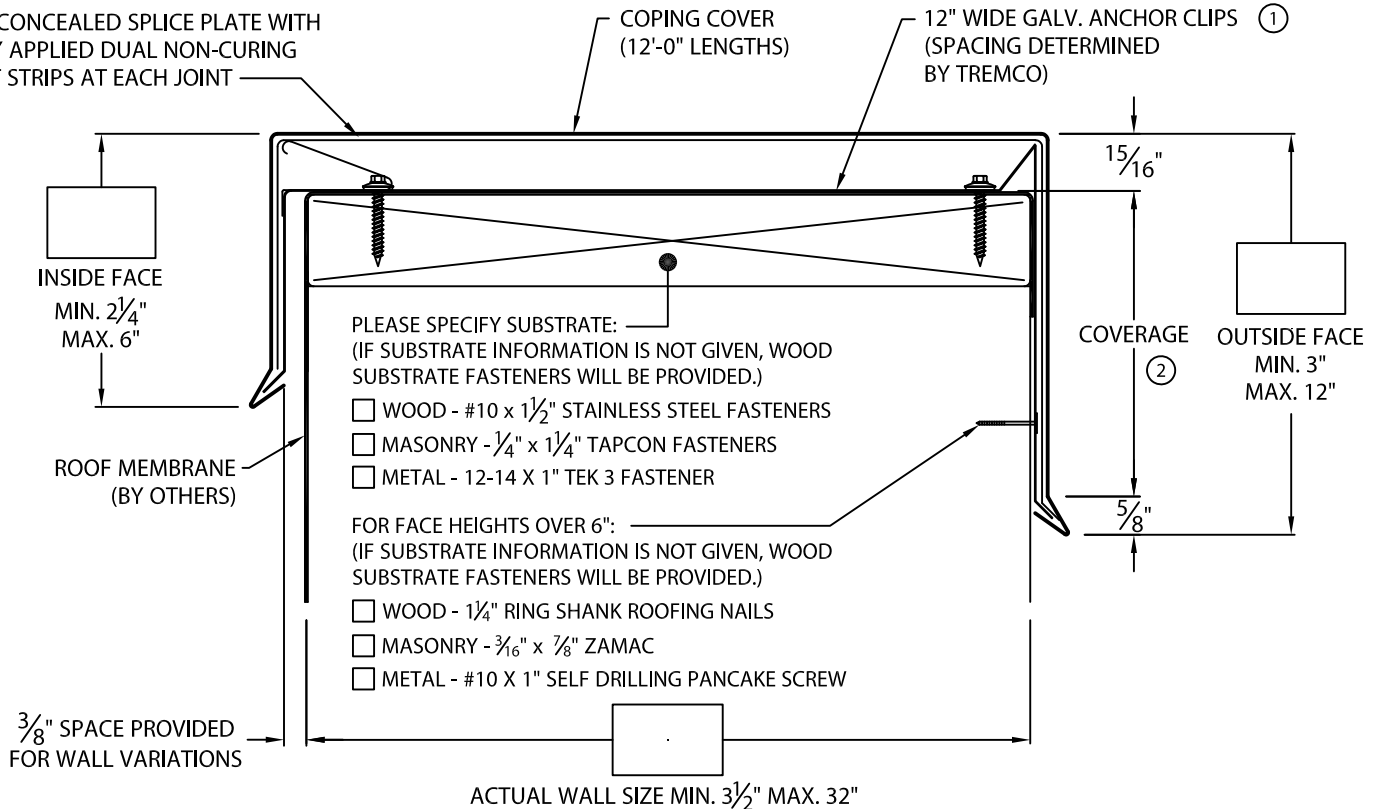

NOTES:

- ① ANCHOR CLIP PROFILE ON WALLS GREATER THAN 14".
- ② FACE = COVERAGE (SHOULD EXTEND A MIN. OF 1" BELOW WATERPROOFING MEMBRANE) + 1 9/16".
- ③ 24 GA. GALV. AND .040" ALUM. COPING COVERS AVAILABLE FOR WALL SIZES 3 1/2" TO 24" ONLY.
- ④ WELDED ACCESSORIES REQUIRE A MINIMUM MATERIAL THICKNESS OF .050".
- ⑤ FOR NON 90° MITERS PLEASE USE PRINT APPROVAL #60011-29132.



MATERIAL:

___ 24 GA. GALVANIZED STEEL ③ ___ .040" ALUMINUM ③
___ 22 GA. GALVANIZED STEEL ___ .050" ALUMINUM
___ OTHER ___ .063" ALUMINUM
COLOR: _____ FINISH: _____

QUANTITIES:

_____ LINEAL FEET 12'-0" LENGTHS

ACCESSORIES:

___ OUTSIDE MITERS @ 90° ⑤
___ INSIDE MITERS @ 90° ⑤
___ RIGHT ENDCAPS
___ LEFT ENDCAPS
___ RIGHT ENDWALL (COPING VERSION)
___ LEFT ENDWALL (COPING VERSION)
___ RIGHT ENDWALL (SPLICE PLATE VERSION)
___ LEFT ENDWALL (SPLICE PLATE VERSION)

SPECIFY ACCESSORY TYPE:

- ☐ WELDED ④
- ☐ QUICKLOCK

AUTHORIZED SIGNATURE:

APPROVED BY: _____

DATE: _____



ANSI/SPRI ES-1 TESTED

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

TREMCO ROOFING AND BUILDING MAINTENANCE
3735 GREEN RD; BEACHWOOD, OH 44122

PHONE: 262-953-2666
EDGESYSTEMS@TREMCOINC.COM
WWW.TREMCO ROOFING.COM

DATE: 07/19/18

DRN BY: JJC


CKD BY: SAK

SHT.# ___ OF ___


DWG# 60011-29256

A

TREMLOCK INFINITY COPING

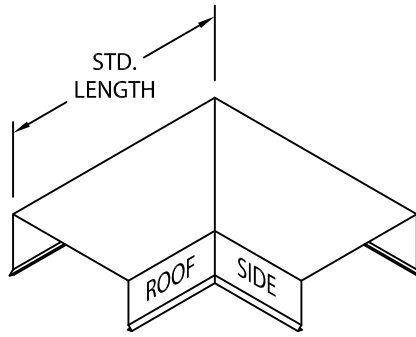


OUTSIDE MITER

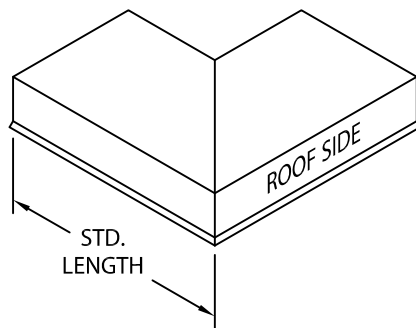


INSIDE MITER

MITER STANDARD LEG LENGTH:
WALL SIZE + $9\frac{5}{8}$ " = LENGTH


TREMLOCK INFINITY COPING STANDARD ACCESSORIES



ENDCAP
(LEFT HAND SHOWN)

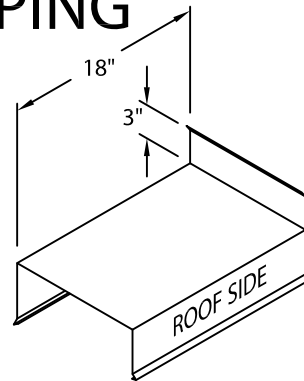

ENDWALL FLASHING
COPING VERSION
(RIGHT HAND SHOWN)

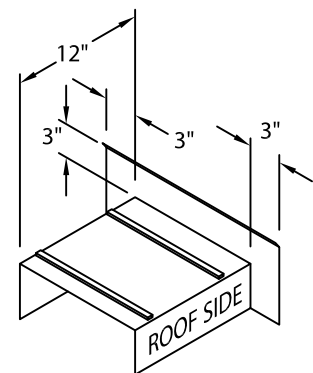

ENDWALL FLASHING
SPLICE PLATE VERSION
(RIGHT HAND SHOWN)
(AVAILABLE ONLY IN
.040" WELDED, PAINTED
TO MATCH COPING)

ADDITIONAL ACCESSORIES ARE AVAILABLE ON WEBSITE:

TRANSITION MITERS
STRAIGHT TRANSITION MITERS
"T" MITERS
"Z" MITERS
STEP-UP MITERS
PEAK / VALLEY MITERS
PILASTER CAPS
RADIUS COPING
ARCHED COPING

(FOR ADDITIONAL ACCESSORY REQUIREMENTS, ATTACH SKETCHES OR CALL MANUFACTURER FOR ASSISTANCE).

ANCHOR CLIP SPACING:

24 GA. / .040", 16" WALL SIZE OR LESS, ANCHOR CLIPS ARE 48" O.C.
24 GA. / .040", OVER 16" WALL SIZE, ANCHOR CLIPS ARE 36" O.C.
22 GA. / .050" / .063", $26\frac{1}{2}$ " WALL SIZE OR LESS, ANCHOR CLIPS ARE 48" O.C.
22 GA. / .050" / .063", OVER $26\frac{1}{2}$ " WALL SIZE, ANCHOR CLIPS ARE 36" O.C.
FLORIDA JOBS HAVE ANCHOR CLIPS 36" O.C. FOR ALL WALL SIZES.

ANCHOR CLIP MATERIAL IS 20 GA. GALV. FOR ALL WALL SIZES UP TO $26\frac{1}{2}$ ".
16 GA. GALV. FOR ALL WALL SIZES GREATER THAN $26\frac{1}{2}$ "