

# TREMLOCK TRAVERSE QUICKLOCK RADIUS COPING

SINGLE SIDE SPACE 10" OR LESS, OUTSIDE FACE 3 1/2" TO 12" VERSION

**IMPORTANT!!!** MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS  
THE RADIUS MAY BE PROVIDED  
IN ONE OF TWO METHODS:

1.) THE ACTUAL KNOWN RADIUS IS

\_\_\_\_\_ ' FEET \_\_\_\_\_ " INCHES

MINIMUM  
OF 3'-0"


OR

2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET  
FOR FURTHER INFORMATION


\_\_\_\_\_ " INCHES

RISE  
MAXIMUM  
OF 4 3/4"

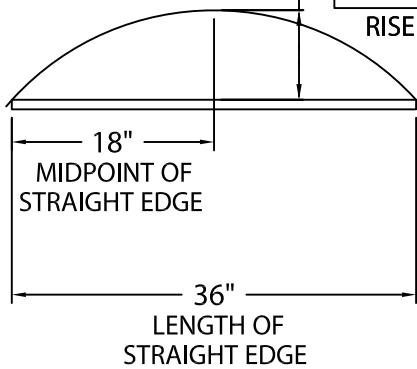

NOTE: CHECK MEASUREMENTS ALONG ENTIRE RADIUS.

DETAIL A

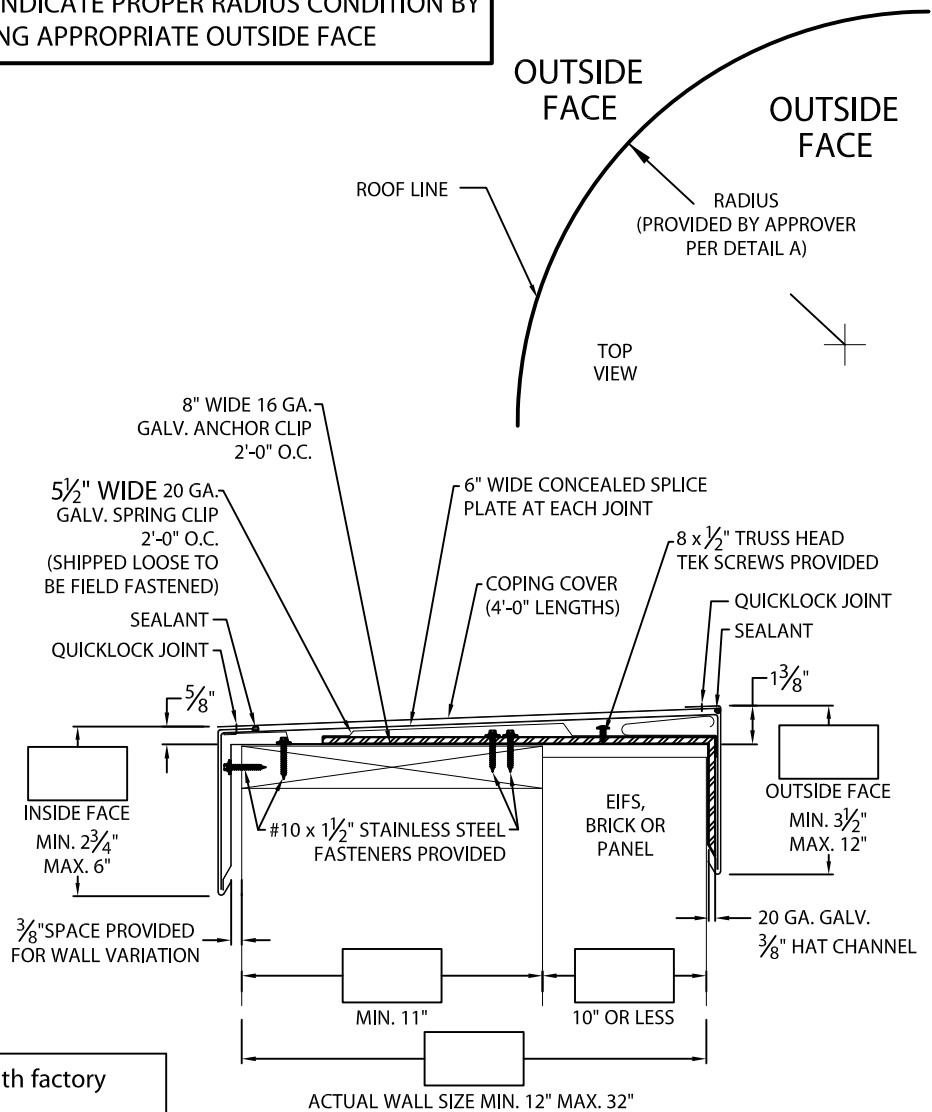

**NOTES:** -- Concealed splice plates are provided with factory applied dual non-curing sealant strips.

-- Fabrication of radius is furnished utilizing a non-penetrating quicklock joint, then factory sealed watertight.

Fabrication will proceed only after receipt of signed print approval.

## Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Tremco's printed instructions.

Approved by: \_\_\_\_\_

Date: \_\_\_\_\_

## MATERIALS:

\_\_\_ 24 Ga. Steel

\_\_\_ .040" Aluminum

\_\_\_ .050" Aluminum

\_\_\_ .063" Aluminum

\_\_\_ Other \_\_\_\_\_

Color: \_\_\_\_\_

Finish: \_\_\_\_\_

## QUANTITIES:

\_\_\_\_\_ Lineal Feet 4'-0" Lengths

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

TREMCO ROOFING AND BUILDING MAINTENANCE

3735 GREEN RD; BEACHWOOD, OH 44122

PHONE: 262-953-2666

EDGESYSTEMS@TREMCOINC.COM

WWW.TREMCOROOFING.COM

**TREMCO**  
ROOFING & BUILDING MAINTENANCE

DATE: 07/30/18

DRN BY: JJC

CKD BY: SAK

SHT.# \_\_\_\_\_ OF \_\_\_\_\_

DWG# 60011-29387

A