


## REMLOCK 215 FASCIA SING

FULLY ADHERED OR MECHANICALLY ATTACHED SINGLE-PLY VERSION

ANSI/SPRI ES-1 DESIGN PRESSURE OF UP TO 275 psf

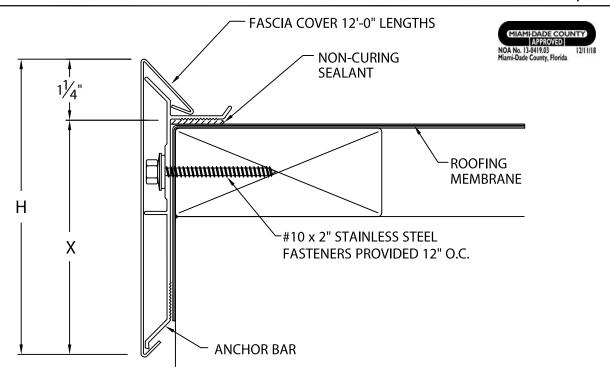

	CK 215 FASCIA PLY DIMENSION	S	
PRODUCT	Н	Х	NAILER
ID. NO.	DIM	DIM	COVERAGE
☐ AF-40	4"	2 3/4"	1 NAILER
☐ AF-55	5 1/2"	4 1/4"	2 NAILERS
☐ AF-70	7"	5 3/4"	3 NAILERS
☐ AF-85	8 1/2"	7 1/4"	4 NAILERS

<b>MATERIAL:</b>	
-	24 Ga. Galv. Steel
-	040" Aluminum
-	OTHER
Color:	Finish:

Fabrication will proceed only after receipt of signed print approval.

## Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Tremco's printed instructions.

Approved by:_		
Date:		

## **QUANTITIES:**

Lineal Feet  12'-0" Lengths
Outside Miter(s) @ 90°
Inside Miter(s) @ 90°
Overflow Scupper StyleAB
Spillout Scupper StyleAB
Downspout Scupper StyleAB
(X) Size A: Tapered 1 1/2" Drop B: Flat
FOR NON-90 MITERS SEE PRINT APPROVAL #60010-29179

**PROJECT:** ARCHITECT:

TREMCO ROOFING AND BUILDING MAINTENANCE 3735 GREEN RD; BEACHWOOD, OH 44122 PHONE: 800-558-2162 **ROOFING CONTRACTOR:** EDGESYSTEMS@TREMCOINC.COM REPRESENTATIVE/DISTRIBUTOR: WWW.TREMCOROOFING.COM



DATE: 07/11/18 SHT.# OF DRN BY: JJC DWG# 60010-29178 CKD BY: SAK