


## TREMLOCK ECO GRAVEL STOP

6" MAX. FACE HEIGHT WITH CONTINUOUS CLEAT VERSION

ANSI/SPRI/FM 4435/ ES-1 DESIGN PRESSURE OF 216 psf

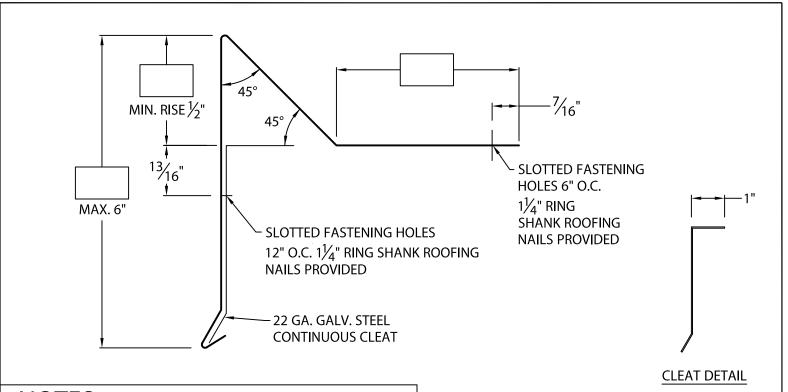

## **NOTES:**

- INCLUDES 6" WIDE CONCEALED SPLICE PLATES.
- -- CONCEALED SPLICE PLATES MUST BE FIELD CAULKED TO PREVENT WATER ENTRY.
- -- UNLESS OTHERWISE NOTES, FABRICATION OF MITERS AND ACCESSORIES ARE FURNISHED STANDARD UTILIZING A NON-PENETRATING QUICKLOCK JOINT, THEN FACTORY SEALED WATERTIGHT.

Fabrication will proceed only after receipt of signed print approval.

## **Print Approval:**

**ROOFING & BUILDING MAINTENANCE** 

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Tremco's printed instructions.

Approved by:_	
Date:	

FOR FACE SIZES	OVER 6"	SEE PRIN	IT APPROV	ΆL
#60010-29252				

-- WELDED MITERS AND ACCESSORIES

CHECK ONE	REQUIRED (SURCHARGE)	☐ NOT APPLICABLE

MATERIAL:	
24 GA. GALVANIZED S	STEEL
040" ALUMINUM	COLOR:
050" ALUMINUM	COLON
063" ALUMINUM	FINISH:
OTHER	

QUANTITIES	Q	JΑ	Ν			ES	
------------	---	----	---	--	--	----	--

LINEAL FEET 12'-0" LENGTHS
OUTSIDE MITERS @ 90°
INSIDE MITERS @ 90°

DRN BY: JJC

**CKD BY: SAK** 

FOR NON 90° MITERS SEE PRINT APPROVAL #60010-29179

DWG# 60010-29251

PROJECT:	TREMCO ROOFING AND BUILDING MAINTENANCE
ARCHITECT:	3735 GREEN RD; BEACHWOOD, OH 44122
ROOFING CONTRACTOR:	PHONE: 800-558-2162 EDGESYSTEMS@TREMCOINC.COM
REPRESENTATIVE/DISTRIBUTOR:	WWW.TREMCOROOFING.COM
TDEMCO	DATE: 07/18/18 SHT.# OF