

# TremPly® KEE Plus Stress Plates



**Engineered to provide enhanced load distribution and superior wind resistance for TremPly KEE Roofing Systems**

## DESCRIPTION:

TremPly® KEE Plus Stress Plates are manufactured from 0.47 in. (1.19 mm thick) AZ50 Galvalume coated steel. Oblong in shape, they feature three-quarter inch (1.9 cm) radial corners, a 0.25 in (0.635 cm) hole in the center of the plate, a raised reinforcement area to resist deflection and 12 barbs to enhance wind resistance all within a compact 2<sup>3</sup>/<sub>4</sub>" x 1<sup>1</sup>/<sub>2</sub>" plate.

## BASIC USES:

TremPly KEE Plus Stress Plates are designed to provide exceptional wind uplift resistance for mechanically attached TremPly KEE roof systems. This product is FMG approved for Class One Mechanically Attached TremPly KEE Roofing Systems and exceeds FM Global (FMG 4470) requirements for corrosion resistance.

## APPLICATION:

TremPly KEE Plus Stress Plates are engineered for all mechanically fastened TremPly KEE Roofing Systems.

For fastener and stress plate placement, installation instructions, and frequency and their correlation to specific approvals for wind resistance, consult the most current versions Tremco Roofing's Guide Specifications for the Installation of TremPly KEE Roofing Systems. Ensure that you are only using fasteners approved for use with TremPly KEE Plus Stress Plates.

The application information provided in this data sheet serves as general guidance. Please refer to Tremco application guides and project specific specifications or consult with your local Tremco Roofing sales representative for project specific application requirements. Refer to the Safety Data Sheet (SDS) for material precautions.

## MAINTENANCE:

Your local Tremco Roofing representative can provide you with effective maintenance procedures, which may vary depending upon specific conditions. Periodic inspections, early repairs and preventive maintenance are all part of a sound roof program.

## TECHNICAL SERVICES:

Please contact your local Tremco Roofing representative. Working with the Technical Service Staff, your representative can help analyze conditions and needs to develop recommendations for special applications.



8/10/18

[www.tremcoroofing.com](http://www.tremcoroofing.com)  
3735 Green Road  
Beachwood, Ohio 44122  
1.800.852.6013




50 Beth Neilson Drive  
Toronto, Ontario M4H 1M6  
1.800.668.9879

TremPly is a U.S. registered trademark of Tremco Incorporated.

The information provided on this data sheet is effective as of June 2018 and supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCES SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.

# TremPly® KEE Plus Stress Plates

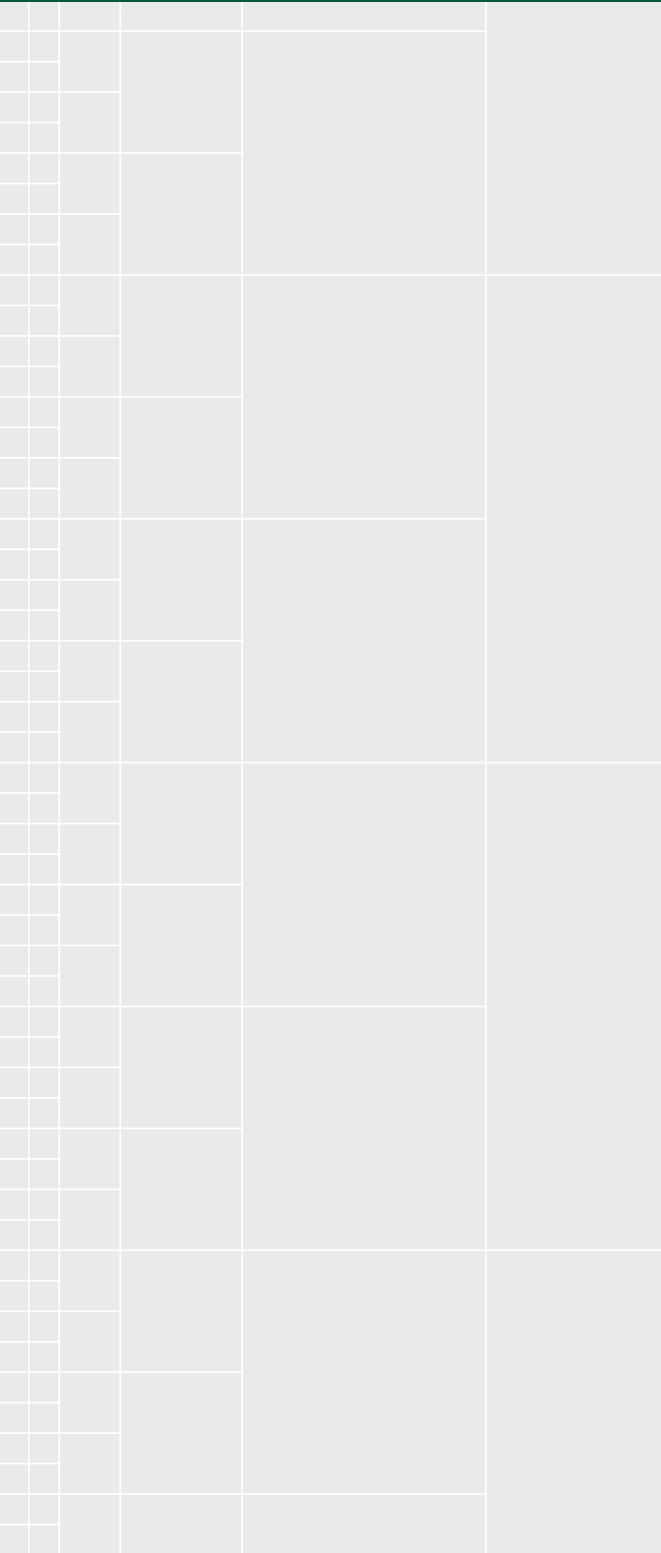

7255  
8/10/18

[www.tremcoroofing.com](http://www.tremcoroofing.com)

3735 Green Road  
Beachwood, Ohio 44122  
1.800.852.6013



50 Beth Neelson Drive  
Toronto, Ontario M4H 1M6  
1.800.668.9879

TremPly is a U.S. registered trademark of Tremco Incorporated.

The information provided on this data sheet is effective as of June 2018 and supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCES SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.