

TREMLOCK TRAVERSE WELDED RADIUS COPING

DOUBLE SIDE SPACE 6" OR LESS, OUTSIDE FACE 3 1/2" TO 12" VERSION

IMPORTANT!!! MUST INDICATE PROPER RADIUS CONDITION BY CIRCLING APPROPRIATE OUTSIDE FACE

PROVIDING A RADIUS
THE RADIUS MAY BE PROVIDED
IN ONE OF TWO METHODS:

1.) THE ACTUAL KNOWN RADIUS IS

_____ ' FEET _____ " INCHES

MINIMUM
OF 3'-0"


OR

2.) FIELD CONDITION MEASUREMENTS

NOTE: REFER TO ATTACHED WORKSHEET
FOR FURTHER INFORMATION



_____ " INCHES

RISE
MAXIMUM
OF 4 3/4"

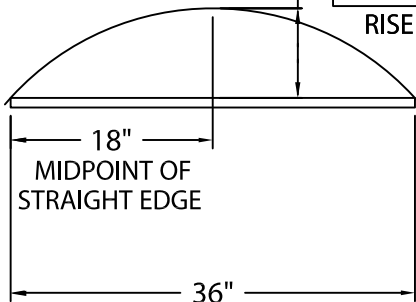

LENGTH OF
STRAIGHT EDGE

NOTE: CHECK MEASUREMENTS
ALONG ENTIRE RADIUS.
DETAIL A

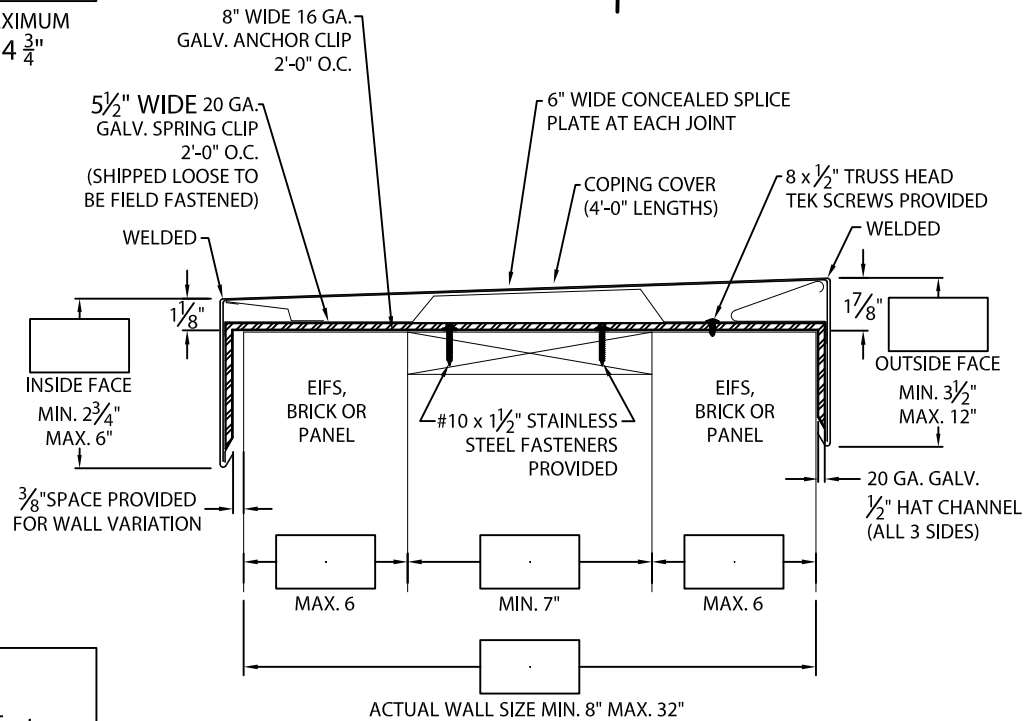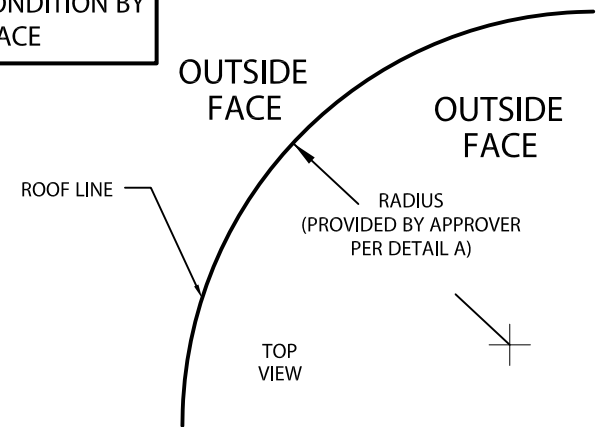

NOTES:

-- Concealed splice plates are provided with factory applied dual non-curing sealant strips.

Fabrication will proceed only after receipt of signed print approval.

Print Approval:

Architect and/or contractor shall verify all dimensions, sizes and quantities. All products to be installed in strict accordance with Tremco's printed instructions.

Approved by: _____

Date: _____

MATERIALS:

Top - .080" Alum.

Sides - .063" Alum.

Color: _____

Finish: _____

QUANTITIES:

_____ Lineal Feet 4'-0" Lengths

PROJECT:

ARCHITECT:

ROOFING CONTRACTOR:

REPRESENTATIVE/DISTRIBUTOR:

TREMCO ROOFING AND BUILDING MAINTENANCE
3735 GREEN RD; BEACHWOOD, OH 44122
PHONE: 262-953-2666
EDGESYSTEMS@TREMCOINC.COM
WWW.TREMCOROOFING.COM

TREMCO
ROOFING & BUILDING MAINTENANCE

DATE: 07/30/18

DRN BY: JJC

CKD BY: SAK

SHT.# ____ OF ____

DWG# 60011-29385

A